

HX18KG6082G SP8T Switch


1. Description

ID	Items	Specifications
1-1	Type	Absorptive SP8T Switch
1-2	Frequency Range	0.4 ~ 12GHz
1-3	Isolation	≥80dB
1-4	Insertion Loss	≤4.0dB
1-5	Channel Amplitude Consistency	≤0.5dB
1-6	VSWR	≤1.8
1-7	Impedance	50Ω
1-8	RF Input Power	24dBm
1-9	Switching Speed	≤200ns
1-10	Input/Output Connectors	SMA-F
1-11	Control Connectors	DB9-male
1-12	Control	TTL=0 ~ 0.8V/3.3 ~ 5V
1-13	DC Power Supply	+5V/≤350mA

2. Environmental Specifications

ID	Items	Specifications
2-1	Operational Temperature	-40°C ~ +70°C
2-2	Storage Temperature	-55°C ~ +85°C

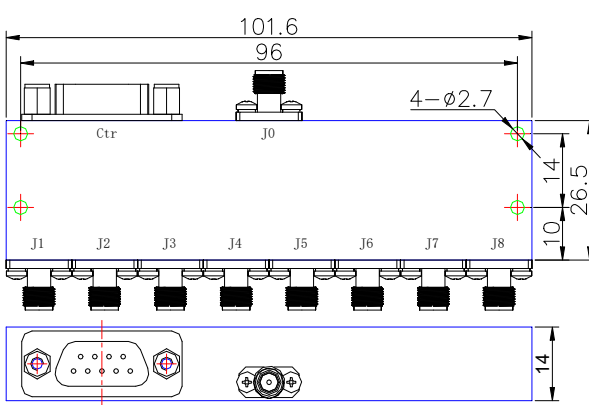
3. Interface

ID	Items	Specifications
3-1	Control Connectors	DB9-male
		
3-2	ID	Specifications
	1	C1
	2	C2
	3	C3
	4	C4
	5	NC
	6	NC
	7	+5V
	8	NC
9	GND	

4. Truth Table

ID	C4	C3	C2	C1	Signal Path State
4-1	0	0	0	0	J0→J1
	0	0	0	1	J0→J2
	0	0	1	0	J0→J3
	0	0	1	1	J0→J4
	0	1	0	0	J0→J5
	0	1	0	1	J0→J6
	0	1	1	0	J0→J7
	0	1	1	1	J0→J8
	1	X	X	X	All Ports Off

5. Outline Drawing

ID	Items	Specifications
5-1	Outline Drawing	Unit: mm
Tolerances:±0.1mm		
		
5-2	Material	Aluminum
5-3	Finished	Natural Color
5-4	Weight	≤100g

NOTE: ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT IDTICE AT ANY TIME.