

HX28KGGF3082G Switch Matrix Module


1. Description

ID	Items	Specifications
1-1	Type	Absorptive 2*8 Switch Matrix Module
1-2	Frequency Range	0.5 ~ 8GHz
1-3	Isolation	≥120dB
1-4	Insertion Loss	≤10dB
1-5	VSWR	≤1.8
1-6	Impedance	50Ω
1-7	RF Input Power	2W
1-8	Switching Speed	≤200ns
1-9	Input/Output Connectors	SMA-F
1-10	Control Connectors	DB15-Female
1-11	Control	TTL=0 ~ 0.8V/3.3 ~ 5V
1-12	DC Power Supply	+5V/≤700mA

2. Environmental Specifications

ID	Items	Specifications
2-1	Operational Temperature	-40°C ~ +70°C
2-2	Storage Temperature	-55°C ~ +85°C

3. Interface


ID	Items	Specifications
3-1	Control Connectors	DB15-Female
		
3-2	NO	Specifications
	1、2	+5V
	3、4	GND
	5	C1
	6	C2
	7	C3
	8	C4
	9	C5
	10	C6
	11	C7
	12	C8
	13~15	NC

4. Truth Table

ID	C4	C3	C2	C1	Signal Path State
4-1	0	0	0	0	IN1→OUT1
	0	0	0	1	IN1→OUT2
	0	0	1	0	IN1→OUT3
	0	0	1	1	IN1→OUT4
	0	1	0	0	IN1→OUT5
	0	1	0	1	IN1→OUT6
	0	1	1	0	IN1→OUT7
	0	1	1	1	IN1→OUT8
	1	0	0	0	IN1 Ports Off
ID	C8	C7	C6	C5	Signal Path State
4-2	0	0	0	0	IN2→OUT1
	0	0	0	1	IN2→OUT2
	0	0	1	0	IN2→OUT3
	0	0	1	1	IN2→OUT4
	0	1	0	0	IN2→OUT5
	0	1	0	1	IN2→OUT6
	0	1	1	0	IN2→OUT7
	0	1	1	1	IN2→OUT8
	1	0	0	0	IN2 Ports Off

5. Outline Drawing

ID	Items	Specifications
5-1	Outline Drawing	Unit: mm
Tolerances:±0.1mm		

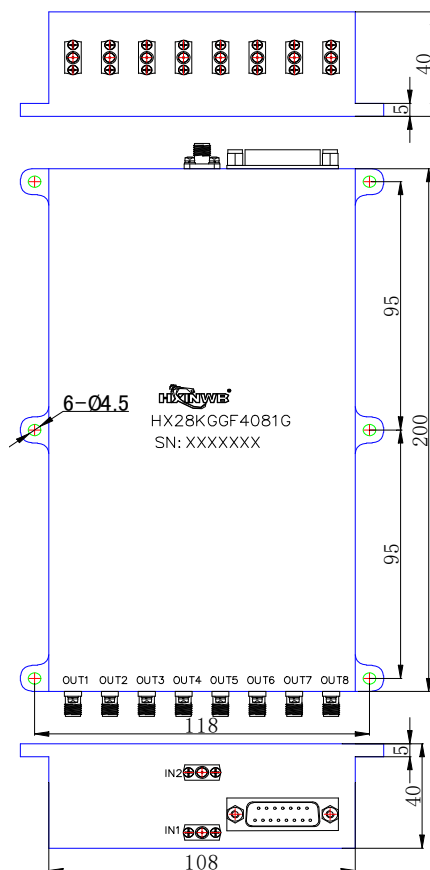

5-2	Material	Aluminum
5-3	Finished	Nickel Plated
5-4	Weight	/

NOTE: ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.